


# STAR SERIES

with  
front wheel  
drive



**SUBARU**

STAR 2 DOOR \$1,699<sup>POE</sup>

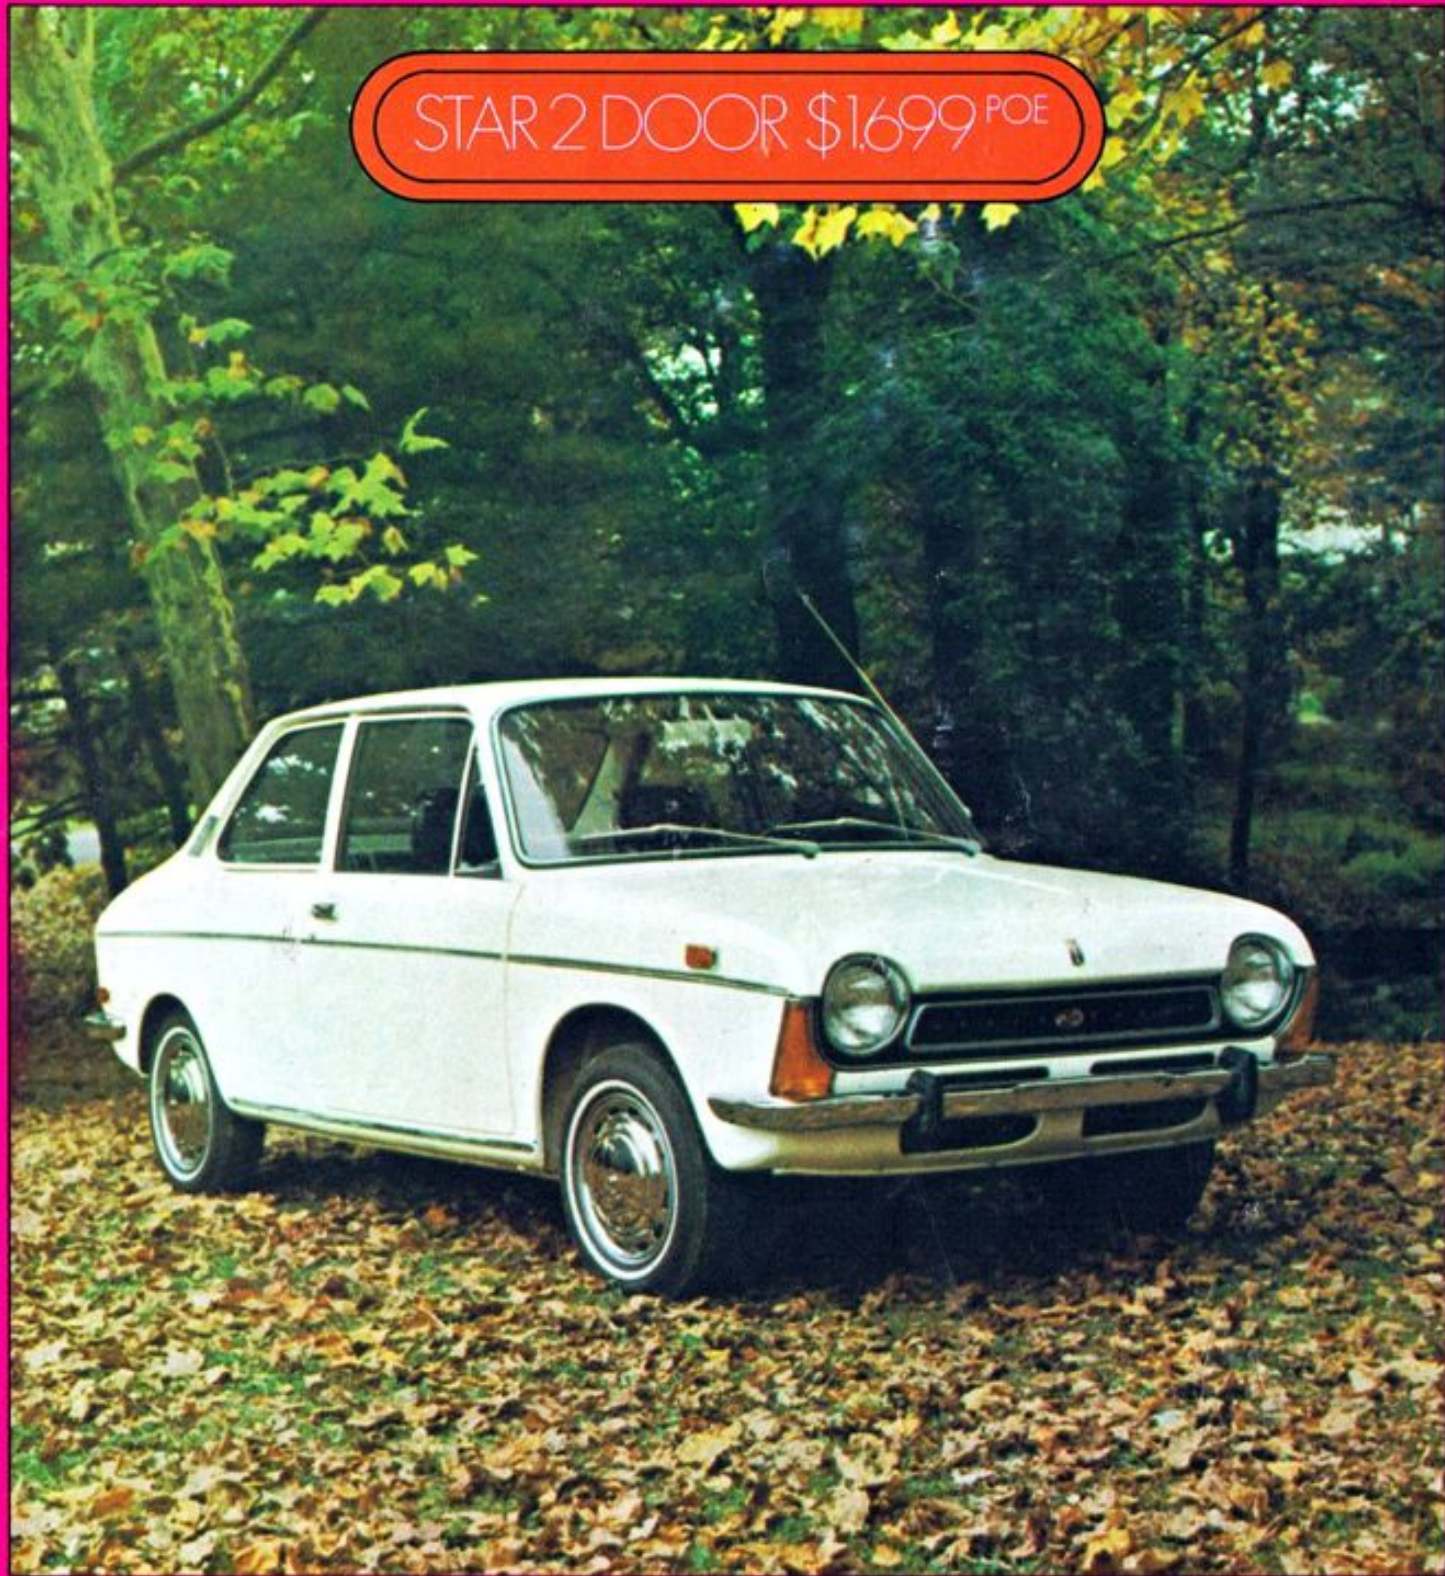

STAR 4 DOOR \$1,799<sup>POE</sup>



STAR WAGON \$1,899<sup>POE</sup>



# SUBARU STAR SPECIFICATIONS

ITEMS	2-DOOR SEDAN	4-DOOR SEDAN	STATION WAGON	ITEMS	2-DOOR SEDAN	4-DOOR SEDAN	STATION WAGON
<b>DIMENSIONS AND WEIGHTS</b>				<b>TRANSMISSION (Continued)</b>			
Overall Length	155.0 in.	155.0 in.	152.8 in.	Gear Ratios	1st:3.540 2nd:2.235 3rd:1.542 4th:1.033 Rev.:4.100	1st:3.540 2nd:2.235 3rd:1.542 4th:1.033 Rev.:4.100	1st:4.000 2nd:2.438 3rd:1.542 4th:1.033 Rev.:4.100
Overall Width	58.3 in.	58.3 in.	58.3 in.	Final Reduction Gear	Hypoid Gear	Hypoid Gear	Hypoid Gear
Overall Height	54.7 in.	54.7 in.	55.7 in.	Final Reduction Gear Ratio	4.125	4.125	4.125
Cargo Bed Length			57.0 in.	<b>CLUTCH</b>			
Cargo Bed Width			47.5 in.	Type	Dry Single Plate Diaphragm Type		
Cargo Deck Ground Height			15.2 in.	<b>STEERING SYSTEM</b>			
Wheel Base	95.2 in.	95.2 in.	95.2 in.	Type	Rack & Pinion	Rack & Pinion	Rack & Pinion
Tread Front	48.2 in.	48.2 in.	48.2 in.	<b>SUSPENSION</b>			
Tread Rear	47.6 in.	47.6 in.	48.5 in.	Front Axle	Wishbone Type Independent Suspension		
Ground Clearance	7.1 in.	7.1 in.	7.1 in.	Rear Axle	Trailing Arm Type Independent Suspension		
Vehicle Weight	1,420 lbs.	1,430 lbs.	1,540 lbs.	Front Spring	Torsion Bar		
Seating Capacity	5 adults	5 adults	2 or 5 adults	Rear Spring	Torsion Bar With Coil Spring		
<b>PERFORMANCE</b>				<b>TIRES</b>			
Maximum Speed	90 mph	90 mph	90 mph	Size and Type	6.15-13-4PR (Low Profile Type)	6.15-13-4PR (Low Profile Type)	6.15-13-6PR (Low Profile Type)
Climbing Ability Sin 0	0.401	0.397	0.350	<b>BRAKE SYSTEM</b>			
Minimum Turning Circle	31.5 ft.	31.5 ft.	31.5 ft.	Front Brake	(Foot Brake) Duo-Servo (Automatic Adjusting Type)		
Braking Distance	44.3 ft. at 31 mph	44.3 ft. at 31 mph	42.7 ft. at 31 mph	Rear Brake	Leading And Trailing		
Cruising Speed	70 mph	70 mph	70 mph	Parking Brake	Mechanical On Front Wheels		
<b>ENGINE</b>				<b>BODY</b>			
Model	EA61	EA61	EA61	Type	Monocoque Type		
Type	2 Pairs Horizontally Opposed, Water-Cooled, 4 Stroke Engine			<b>STANDARD EQUIPMENT</b> / 4 speed transmission / heater & defroster / foam cushion reclining seats / safety package: headrests, seat belts, shoulder straps / turn indicators / hazard lights / windshield wiper (2 speed) / windshield washer / vinyl interiors / back-up lights / padded sun visors / chrome wheel covers / outside rear-view mirror / security locks for engine / directional signals / courtesy lights / adjustable louvre vents / padded dash / flow-through air system / rear opening windows / tool kit / bumper guards / meets all Federal safety standards and smog control regulations.			
Bore x Stroke	2.99 in. x 2.36 in.	2.99 in. x 2.36 in.	2.99 in. x 2.36 in.				
Piston Displacement	66.4 cu./in.	66.4 cu./in.	66.4 cu./in.				
Compression Ratio	9.0:1	9.0:1	9.0:1				
Maximum Output	62 HP/6,000 rpm	62 HP/6,000 rpm	62 HP/6,000 rpm				
Maximum Torque	62.9 lb.-ft./3,200 rpm	62.9 lb.-ft./3,200 rpm	62.9 lb.-ft./3,200 rpm				
Fuel Tank Capacity	9.5 U.S. gal.	9.5 U.S. gal.	9.5 U.S. gal.				
<b>ELECTRICAL EQUIPMENT</b>							
Battery	12V-32AH	12V-32AH	12V-32AH				
Generator	12V-360W	12V-360W	12V-360W				
Starter	12V-600W	12V-600W	12V-600W				
<b>TRANSMISSION</b>							
Number of Speeds	4-Speed Forward, 1-Reverse						
Transmission Type	Synchromeshed On All 4 Forward Speeds, Selective Sliding On Reverse						

# SUBARU OF AMERICA

EASTERN DIVISION | 7040 CENTRAL HIGHWAY | AIRPORT CIRCLE INDUSTRIAL PARK | PENNSAUKEN, NEW JERSEY 08109  
WESTERN DIVISION | 1000 WEST COAST HIGHWAY | NEWPORT BEACH, CALIFORNIA 92660