



**MAZDA 1200
SEDAN**



MAZDA 1200 4-DOOR SEDAN

DELUXE MODEL

Here's the perfect balance of luxury and economy. The 1200 Sedan Deluxe has flowing lines on the outside and custom contoured reclining seats on the inside. Its 68 horsepower aluminum alloy engine, with its heat dissipating durability really puts out. And in spite of its 2,260mm (7'5") wheelbase, the 1200 has a tiny 4-meter turning radius, smallest in its class. Add to all this the soft ride and you know why the MAZDA 1200 is the king of its class.



1200cc 68PS



Many extra safety features

Yes, the 1200 has many extra safety features. Including panoramic front window. Special compound safety glass. Padded dashboard. Special all-weather fresh air system that keeps your windows clear, even in the monsoon season. Built-in front seat headrests. Positive crankcase ventilation system. Extra big brake drums. And many, many more.

Luxury interior seats

There's so much room in the MAZDA 1200 that both front seats recline independently. The oval interior shape gives plenty of head, leg and shoulder room. And the custom contoured seats are covered with luxurious looking, but easy-to-clean leather-like vinyl. The four doors guarantee ease of entering.

1200cc 68ps

This is MAZDA's famous aluminum alloy engine, a proven performer. It's extra light. Extra heat dissipating. Extra durable. The 1200cc version produces a big 68 horsepower at 6000rpm, using a double-barrel carburettor and high rising camshaft. The sports car-like floor shift,

with four synchromeshed gears forward, delivers power when you want it. All the way around, it's an exciting car to own.

SPECIFICATIONS MAZDA 1200 4-Door Sedan

DIMENSIONS

Overall length	3,795mm (12' 6")
Overall width	1,480mm (4' 11")
Overall height	1,390mm (4' 7")
Wheel base	2,260mm (7' 5")
Tread (front)	1,200mm (3' 11")
Tread (rear)	1,190mm (3' 11")
Interior length	1,700mm (5' 7")
Interior width	1,265mm (4' 2")
Interior height	1,140mm (3' 9")
Road clearance	160mm (5")

WEIGHT 735 kg (1,619 lbs.)

PERFORMANCE

Min. turning radius	4m (13' 2")
Braking distance	14m (45' 11") at initial speed
	50km/h (31mph)

ENGINE

Type	Water cooled, in-line, 4-cylinder
Bore & stroke	70mm (2.8") x 76mm (3.0")
Piston displacement	1,169 cc (71.3cu. in.)
Max. brake horsepower	68 ps / 6,000 rpm
Max. torque	9.6 kg-m / 3,000 rpm
Compression ratio	8.6
Fuel	Gasoline

FUEL SYSTEM

Carburettor	Stromberg
Fuel pump	Mechanical pump
Air cleaner	Filter paper type
Fuel tank capacity	40 lit. 8.8 imp. gals.

LUBRICATION SYSTEM

Type	Full forced type
Oil pump	Trochoid gear type
Oil strainer	Filter paper type

POWER TRANSMISSION SYSTEM

Clutch	Dry, single plate Diaphragm type
Transmission	4 forward speeds, 1 reverse, synchromeshed on all forward gears
Gear ratio 1st.	3.655
2nd.	2.185
3rd.	1.425
top	1.000
rev.	3.655
Gear shift	Floor shift

FINAL REDUCTION GEAR

Type of gear	Hypoid gear
Gear ratio	4.111

STEERING SYSTEM

Gear	Ball and nut type
Gear ratio	17.63:1

SUSPENSION & DRIVE SYSTEM

Suspension (front)	Strut type with coil springs
Suspension (rear)	Semi-elliptic leaf springs
Shock absorber (front)	Double acting hydraulic type
Shock absorber (rear)	Double acting hydraulic type
Axle (rear)	Semi-floating type

BRAKES

Foot brake (front)	Hydraulic, internal expanding 2 leading shoe type
Foot brake (rear)	Hydraulic, internal expanding leading & trailing shoe type
Hand brake	Mechanical, internal expanding type on rear wheels

TIRES


front	6.00-12-4PR
rear	6.00-12-4PR

FRAME

Semi-monocoque

Radio and heater are optional.

The above specifications are subject to change without notice.

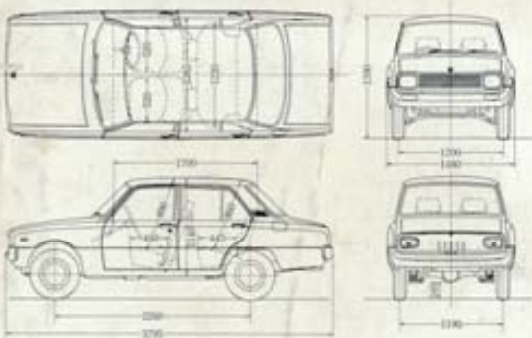

STANDARD BODY COLORS:

SILKY WHITE

PASTEL GRAY

SICILY BEIGE

CORDOBA RED

CARIBBEAN BLUE

VAR GREEN

Some of the body colors shown here may be of slightly different shade from the actual paint work. True color samples are available at the dealers.



MAZDA

TOYO KOGYO CO., LTD. HIROSHIMA, JAPAN

